

When it comes to installing antennas, installers face new challenges every day. Automobile manufacturers create sleek new designs with curved surfaces utilizing less and less metal. In addition, people are less willing to drill a hole in expensive new cars. This creates problems when trying to install an antenna to achieve maximum performance. Larsen, recognizing this issue, has developed a full line of permanent and temporary mounts to solve virtually every installation need.

Each Larsen mount is manufactured of the highest quality materials, including premium coax. If you have a special requirement not represented, contact the factory. We will do our best to fill your need.

Note: Connectors are shipped loose/uninstalled with all mounting kits except MMR magnetic mounts. An FME universal adapter is installed on all kits.



MODEL

LMB	Mounting hardware only, Black
LMB1/4	Mounting hardware only, 1/4" longer stud

SPECIFICATIONS

SIZE	3/4" diameter hole
TYPE	5/16" x 24 THDS



MOUNTS



MODEL	COAX	CONN
LMKNOCONN	CX	No Conn
LMKFME	CX	FME CRIMP
LMKN	CX	N CRIMP
LMK	CX	PL-259
LMKDS	DS	No Conn
LMKDSFME	DS	FME CRIMP
LMKDSMPL	DS	MPL CRIMP
LMKDSN	DS	N CRIMP
LMKUD	UD	No Conn
LMKUDFME	UD	FME CRIMP
LMKUDMPL	UD	MPL CRIMP
LMKUDN	UD	N CRIMP

SPECIFICATIONS

SIZE	3/4" diameter hole
TYPE	5/16" x 24 THDS, roof mount
COAX	17'



MODEL	COAX	CONN
LMMMFME	CX	FME CRIMP
LMMMPL	CX	MPL CRIMP
LMMM	CX	58FCP
LMMMTNC	CX	TNC CRIMP
LMMMBNC	CX	BNC CRIMP
LMMMPL	CX	PL-259
LMMMDS	DS	No Conn
LMMMDSFME	DS	FME CRIMP
LMMMDSMPL	DS	MPL CRIMP
LMMMDSPL	DS	PL-259T

SPECIFICATIONS

SIZE	3 1/2" x 3" rectangle
TYPE	5/16" x 24 THDS, mag mount
PULL STRENGTH	50 lbs
COAX	12'

MODEL	COAX	CONN
LMTLP	CX	PL-259
LMTLPDS	DS	Order separately

SPECIFICATIONS	
SIZE	2 1/2" x 2"
TYPE	5/16" x 24 THDS, trunk lid mount
COAX	17'



MODEL	CONNECTOR
NMOB	Mounting hardware only

SPECIFICATIONS	
SIZE	3/4" diameter hole
TYPE	Motorola style



MOUNTS

MODEL	CONNECTOR
NMO38THK	Mounting hardware only

SPECIFICATIONS	
SIZE	3/8" diameter hole
TYPE	Motorola style thick surface roof mount
	Roof surfaces from 0.15" to 0.22"



MODEL	COAX	CONN
NMOKCX38THK	CX	No Conn
NMOKUD38THK	DS	No Conn


SPECIFICATIONS	
SIZE	3/8" diameter hole
TYPE	Motorola style thick surface roof mount
	Roof surfaces from 0.15" to 0.22"
COAX	17'



MODEL	COAX	CONN
NMOKNOCONN	CX	No Conn
NMOKFME	CX	FME CRIMP
NMOKMPL	CX	MPL CRIMP
NMOK	CX	PL-259
NMOKDS	DS	No Conn
NMOKDSFME	DS	FME CRIMP
NMOKDSN	DS	N CRIMP
NMOKUD	UD	No Conn
NMOKUDFME	UD	FME CRIMP
NMOKUDMPL	UD	MPL CRIMP
NMOKUDN	UD	N CRIMP
NMOKUDPL	UD	PL-259
NMOKUDTNC	UD	TNC CRIMP

SPECIFICATIONS

SIZE	3/4" diameter hole
TYPE	Motorola style roof mount
COAX	17'

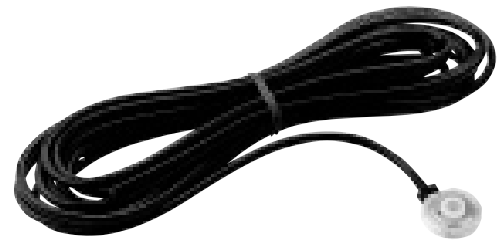

MODEL	CONNECTOR
NMOHF*	Mounting hardware only

SPECIFICATIONS

SIZE	3/4" diameter hole
TYPE	Motorola style Roof surfaces from 0.075" to .03"

**Converts from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.*



MOUNTS



MODEL	COAX	CONN
NMOKHFCX	CX	No Conn
NMOKHFCXFME	CX	FME CRIMP
NMOKHFCXMPL	CX	MINI UHF
NMOKHFCXPL	CX	PL-259
NMOKHFDS	DS	No Conn
NMOKHFUD	UD	No Conn
NMOKHFUDFME	UD	FME
NMOKHFUDMPL	UD	MPL
NMOKHFUDSMA	UD	SMA
NMOKHFUDTNC	UD	TNC
NMOKHF200SMAI	LMR200	SMA Installed
NMOKHF200NCI	LMR200	N Crimp Inst

SPECIFICATIONS

SIZE	3/4" diameter hole
TYPE	Low-loss, high frequency mount Roof surfaces from 0.075" to .03"
COAX	17'

**Converts from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.*



MODEL	COAX
NMOKHFMBXC	CX
NMOKHFMBUD	UD

SPECIFICATIONS

SIZE	3/4" diameter hole
TYPE	Low-loss, high frequency mount
CONNECTOR	Order Separately
COAX	17'

**Converts from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.*



MODEL	
NMOHFTHK*	Mount only
SPECIFICATIONS	
SIZE	3/4" diameter hole
TYPE	Motorola style thick surface roof mount, up to 1/2"
	Features "HF" option
CONNECTOR	None

**Converts from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.*



MODEL	COAX
NMOKHFCXTHK	CX
NMOKHFDSTHK	DS

SPECIFICATIONS	
SIZE	3/4" diameter hole
TYPE	Motorola style thick surface roof mount, up to 1/2"
	Features "HF" option
CONNECTOR	None

**Converts from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.*



MOUNTS



MODEL	COAX	CONN
NMOMMNOCONN	CX	No Conn
NMOMMMPL	CX	MPL CRIMP
NMOMM	CX	58FCP
NMOMMBNC	CX	BNC CRIMP
NMOMMPL	CX	PL-259
NMOMMFME	CX	FME CRIMP
NMOMMTNC	CX	TNC CRIMP
NMOMMDS	DS	No Conn
NMOMMDSFME	DS	FME CRIMP
NMOMMDSMPL	DS	MPL CRIMP
NMOMMDSN	DS	N CRIMP
NMOMMDSPL	DS	PL-259
NMOMMDSTNC	DS	TNC CRIMP
NMOMMUDN	UD	N
NMOMMUDSMART	UD	SMA Reverse Thread

SPECIFICATIONS

SIZE	3 1/2" x 3" rectangle
TYPE	Motorola style mag mount
COAX	12'
PULL STRENGTH	50 lbs

MODEL	COAX	CONN
NMOMMRNOCNN	CX	No Conn
NMOMMRFME	CX	FME CRIMP
NMOMMRMPL	CX	MPL CRIMP
NMOMMRN	CX	N CRIMP
NMOMMR	CX	58FCP
NMOMMRTNC	CX	TNC CRIMP
NMOMMRBNC	CX	BNC CRIMP
NMOMMRPL	CX	PL-259
NMOMMRDS	DS	No Conn
NMOMMRDSFME	DS	FME CRIMP
NMOMMRDSMPL	DS	MPL CRIMP
NMOMMRDSN	DS	N CRIMP
NMOMMRDSSMA	DS	SMA
NMOMMRDSSMARP	DS	SMARP
NMOMMRDSPL	DS	PL-259T
NMOMMRDSTNC	DS	TNC CRIMP
NMOMMR200SMA	LMR200	SMA
NMOMMR200N	LMR200	N

SPECIFICATIONS

SIZE	3 1/4" round
TYPE	Motorola style round mag mount
COAX	12'
PULL STRENGTH	80 lbs

**Converts from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.*



MODEL	CONNECTOR
NMOTLP	PL-259
NMOTLPFME	FME CRIMP
NMOTLPMPL	MPL CRIMP

SPECIFICATIONS

SIZE	2 1/2" x 2"
TYPE	Motorola style trunk lid mount
COAX	17' RG-58A/U



MOUNTS



MODEL	CONNECTOR
-------	-----------

POKNOCONN	No Conn
-----------	---------

SPECIFICATIONS	
----------------	--

SIZE	3/4" diameter hole
TYPE	SO-239 female type roof mount
COAX	17' RG-58A/U

MODEL	CONNECTOR
-------	-----------

POMM	58FCP
------	-------

SPECIFICATIONS	
----------------	--

SIZE	3 1/2" x 3" rectangle
TYPE	SO-239 female type mag mount
COAX	12' RG-58A/U
PULL STRENGTH	50 lbs



MODEL	HOLE SIZE
TMB34D	3/4" diameter hole

SPECIFICATIONS	
SIZE	2 1/8" X 4 1/2"
TYPE	Fender bracket only Fits Dodge Ram trucks Year 2002 and older



MODEL
TMBOM

SPECIFICATIONS	
TYPE	Stainless steel trunk gutter bracket for OM antennas, screws included

